



AC SAFETY CAPACITORS CLASS : X1,Y1

UL、CSA、VDE、FIMKO、NEMKO、SEMKO、SEV、DEMKO----APPROVDE

Safety Std: EN132400:1994 + A2:1997. A3:1998

IEC384 -14.1993 + A1:1995

ACT:4KV



CAPACITANCE AND DIMENSIONS :

PART NUMBER	TC.	CAP.	TOL.	DIMENSION (mm)			
				D std	D max.	F	T max.
CD Y5P 101 KY1	±10% (Y5P)	100PF	K ±10%	7	8	9.5±1	8
CD Y5P 151 KY1		150PF		7	8	9.5±1	8
CD Y5P 221 KY1		220PF		7	8	9.5±1	8
CD Y5P 331 KY1		330PF		8	9	9.5±1	8
CD Y5P 471 KY1		470PF		9	10	9.5±1	8
CD Y5P 561 KY1		560PF		9	10	9.5±1	8
CD Y5P 681 KY1		680PF		11	12	9.5±1	8
CD Y5P 102 KY1		1000PF		12	14	9.5±1	8
CD Y5U 102 MY1	+10 ~ -55% (Y5U)	1000PF	M ±20%	9	10	9.5±1	8
CD Y5U 152 MY1		1500PF		10	11	9.5±1	8
CD Y5U 222 MY1		2200PF		12	14	9.5±1	8
CD Y5U 332 MY1		3300PF		14	15	9.5±1	8
CD Y5U 392 MY1		3900PF		15	16	9.5±1	8
CD Y5U 472 MY1		4700PF		16	17	9.5±1	8

	Standard No	Rated Voltage	
		X1	Y1
UL	UL 1414	250AC	250AC
CSA	C22.2 No.1		
SEMKO	IEC384.14 2 nd edition	400AC	400AC
SEV			
VDE			
FIMKO			
NEMKO			
DEMKO			


Dimensions and Tolerance

B = 3.0mm max (F.S.) or 5.0mm max (F.I.)

d = 0.65mm ± 0.05mm

F = 9.5 ± 1.0mm

L = 5 ~ 25mm

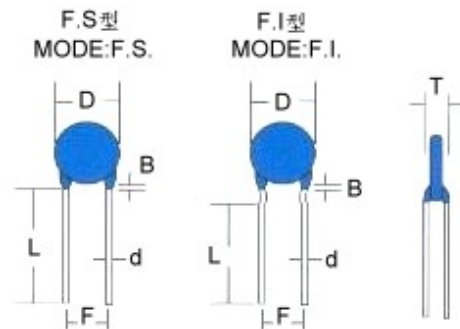

According as customer's request and size