



# AC SAFETY CAPACITORS CLASS : X1,Y2

UL 、 CSA 、 VDE 、 FIMKO 、 NEMKO 、 SEMKO 、 SEV 、 DEMKO----APPROVDE

Safety Std: EN132400:1994 + A2:1997. A3:1998

IEC384 -14.1993 + A1:1995

ACT:2.6KV



CAPACITANCE AND DIMENSIONS :

PART NUMBER	TC.	CAP.	TOL.	DIMENSION (mm)			
				D std	D max.	F	T max.
CE Y5E 100 KY2	±4.7% ( Y5E )	10PF	K ±10%	7	8	7.5±1	6
CE Y5E 150 KY2		15PF		7	8	7.5±1	6
CE Y5E 220 KY2		22PF		7	8	7.5±1	6
CE Y5E 330 KY2		33PF		7	8	7.5±1	6
CE Y5E 470 KY2		47PF		7	8	7.5±1	6
CE Y5E 560 KY2		56PF		7	8	7.5±1	6
CE Y5E 680 KY2		68PF		7	8	7.5±1	6
CE Y5P 101 KY2	±10% ( Y5P )	100PF		7	8	7.5±1	6
CE Y5P 151 KY2		PF		7	8	7.5±1	6
CE Y5P 221 KY2		PF		7	8	7.5±1	6
CE Y5P 331 KY2		PF		8	9	7.5±1	6
CE Y5P 471 KY2		PF		8	9	7.5±1	6
CE Y5P 561 KY2		PF		9	10	7.5±1	6
CE Y5P 681 KY2		PF		9	10	7.5±1	6
CE Y5P 102 KY2	PF	11	12	7.5±1	6		
CE Y5V 102 MY2	+30 ~ -80% ( Y5V )	PF	M ±20%	8	9	7.5±1	6
CE Y5V 152 MY2		PF		8	9	7.5±1	6
CE Y5V 222 MY2		PF		8	9	7.5±1	6
CE Y5V 332 MY2		PF		10	11	7.5±1,9.5±1	6
CE Y5V 392 MY2		PF		10	11	7.5±1,9.5±1	6
CE Y5V 472 MY2		PF		12	13	7.5±1,9.5±1	6
CE Y5V 682 MY2		PF		13	15	9.5±1	6
CE Y5V 822 MY2		PF		14	16	9.5±1	6
CE Y5V 103 MY2		PF		16	18	9.5±1	6

	Standard No	Rated Voltage	
		X1	Y2
UL	UL 1414	250AC	250AC
CSA	C22.2 No.1		
SEMKO	IEC384.14 2nd edition	400AC	300AC
SEV			
VDE			
FIMKO			
NEMKO			
DEMKO			


## Dimensions and Tolerance

B = 3.0mm max (F.S.) or 5.0mm max (F.I.)

d = 0.65mm ± 0.05mm

F = 7.5 or 9.5 ± 1.0mm

L = 5 ~ 25mm

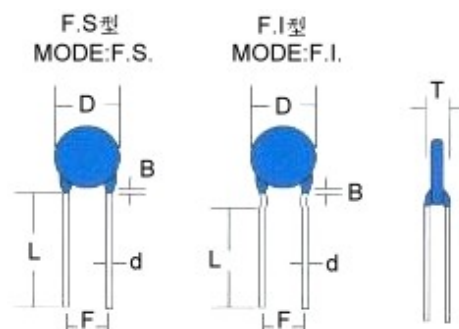

According as customer's request and size